



DATA SHEET

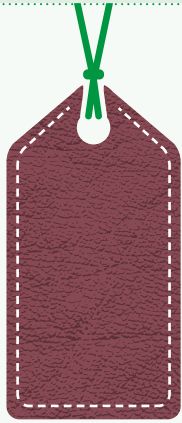

| TESTED FOR | RESULT | CONFIRM TO DIN | LILAC 701 |
|---|--------|--|--|
| Lightfastness: | 2 | 54004 |  <p>Color: Lilac 701 Collection: Rodeo SOFT Thickness: 1,4 - 1,6 mm</p> |
| Possible color change: | |  | |
| Abrasion values: | Level: | | |
| Dry | 2 - 3 | 53339 | |
| Wet | 2 - 3 | | |
| Perspiration | 2 - 3 | | |
| Permanent folding behavior: 20.000 bucklings | passed | 53340 | |
| Tensile strength: 20 N/mm | passed | 53329 | |
| Burning behavior: EN1021 part I u. II | passed | | |
| Detailed information about light fastness, abrasion values, skin tolerance and burning behaviour can be found at: www.vegetable-tanned-leather.com/data-and-facts.html | | | |