

# DATA SHEET



TESTED FOR	RESULT	CONFIRM TO DIN
------------	--------	----------------

MAUSI 181

Lightfastness: 2- 54004

Possible color change:



Abrasion values:	Level:	
Dry	4-	53339
Wet	4-	
Perspiration	4+	


Permanent folding behavior:  
20.000 bucklings passed 53340

Tensile strength:  
20 N/mm passed 53329

Burning behavior:  
y EN1021 part I u. II passed

Detailed information about light fastness, abrasion values, skin tolerance and burning behaviour can be found at:  
[www.vegetable-tanned-leather.com/data-and-facts.html](http://www.vegetable-tanned-leather.com/data-and-facts.html)

Tested for  
Heavy metals, aniline  
(Conducted by the German Institute of Environment in Bremen, 2013/2015)

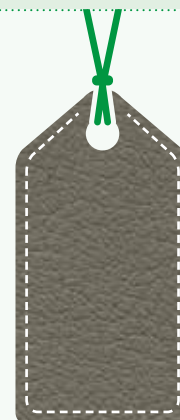

Color: Mausi 181  
Collection: Nappa  
Thickness: 1,4 - 1,6 mm



\* Valid only for skins from eco farming  
(Please ask for availability)

# DATA SHEET



## Results of the examination for aniline

Parameter	K 2407 FL-2 Ecopell 181 Mausl KW 46 (mg/kg)	NG (mg/kg)	Requirements IVN Leather (mg/kg)
Aniline	nn	3	≤ 60*

\* Sum limit for further amines going beyond European legislation  
(2,4 Xylidine, N,N. Dimethylaniline, 5-Chlorine-o-toluidine, p-Phenylenediamine and Aniline)

## Results of the examination for heavy metals

Heavy metals	H 4164 FL-1 Ecopell 181 Mausl KW 40 (mg/kg)	BG (mg/kg)
Antimony	<0,5	0,5
Aluminium	40	10
Arsenic	<1	1
Lead	<0,5	0,5
Cadmium	<0,2	0,2
Chrome	10	1
Cobalt	<1	1
Mercury	<0,2	0,2
Nickel	<1	1
Titanium	<10	10
Zirconium	<2	2

BG = limit of determination | NG = detection limit | mg/KG = milligram per kilogram | nn = not detected