


# DATA SHEET



TESTED FOR	RESULT	CONFIRM TO DIN
Lightfastness:	4	54004
Possible color change:		
Abrasion values:	Level:	
Dry	4 - 5	53339
Wet	4 - 5	
Perspiration	4+	
Permanent folding behavior: 20.000 bucklings	passed	53340
Tensile strength: 20 N/mm	passed	53329
Burning behavior: y EN1021 part I u. II	passed	
Detaillied information about light fastness, abrasion values, skin tollernace and burning behaviour can be found at: <a href="http://www.vegetable-tanned-leather.com/data-and-facts.html">www.vegetable-tanned-leather.com/data-and-facts.html</a>		
Tested for Heavy metals, aniline and p-Phenylendiamin (Conducted by the German Institute of Environment in Bremen, 2013/2017)		

WAIKIKI 818

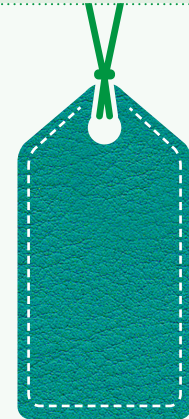

Color: Waikiki 818  
Collection: Nappa  
Thickness: 1,4 - 1,6 mm



\* Valid only for skins from eco farming  
(Please ask for availability)

# DATA SHEET



## Results of the examination for heavy metals

Heavy metals	H 4306 FL-1 Ecopell 818 Waikiki KW 51 (mg/kg)	BG (mg/kg)	Requirements IVN Leather (mg/kg)
Antimony	<0,5	0,1	1
Aluminium	20	10	500
Arsenic	1	1	1
Lead	<0,1	0,1	1
Cadmium	<0,2	0,2	0,2
Chrome	10	2	50
Cobalt	<1	1	5
Mercury	<0,1	0,1	0,2
Nickel	<1	1	5
Titanium	10	10	500
Zirconium	<5	5	500

## Results of the examination for aniline and p-Phenylendiamin

Parameter	K 4659 FL – 6 Ecopell 818 Waikiki [mg/kg]	NG (mg/kg)
Aniline	nn	3
p-Phenylendiamin	nn	5

\* Sum limit for further amines going beyond European legislation  
(2,4 Xylidine, N,N. Dimethylaniline, 5-Chlorine-o-toluidine, p-Phenylendiamine and Aniline)

BG = limit of determination | NG = detection limit | mg/KG = milligram per kilogram | nn = not detected